

GSMWhiteBox2

4 Inputs / 1 Relay output



Add SMS alert messages to your machine, process, security alarms or simple switching device.

4x Inputs
1x Relay output
Battery backup




Overview

GSMWhiteBox2 is a compact SMS alerting and control device ideal for monitoring any unmanned or remote machine, security alarm panel, process or simple switching device. Simple configured by sending SMS messages the unit can send customised alerts on both closing and opening of the 4 input signals.

A built-in rechargeable battery manages power fails and restore alerts and a 10A 240VAC relay can be remotely activated for remote control

- 4 volt-free inputs | 1 relay output | Battery backup
- Programmable by simple SMS messages | Remote relay control
- Alerts to 3 recipients with customisable SMS message

Wiring

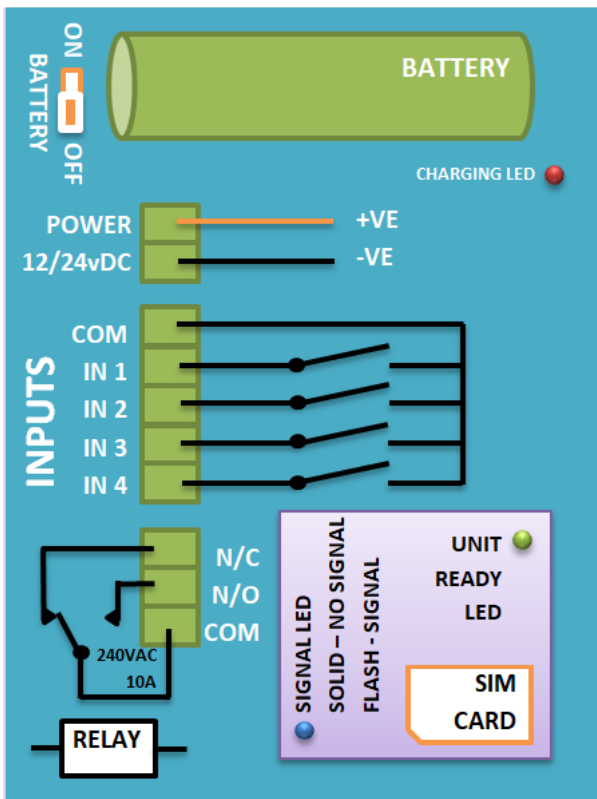

Features

- 4 digital inputs
- Customisable SMS message
- Messages on both inputs closing and opening
- 3 message recipient numbers
- Remote control relay output
- Battery backup for power fail/restore alerts
- Status and signal strength messages

Specification

Communications options	2G SMS
Power Supply Voltage	12-24 VDC
Inputs channels	4 x volt-free digital
Input configuration	Digital N/C or N/O (send message on both)
Input events (alerts)	SMS Customisable
Output channels	1 Relay
Output events (trigger)	Free call, SMS
Output Type	Relay 1A@240VAC
Dimensions	120l x 90w x 40h mm IP65
Operating Temperature	-10...+40°C
Configuration	By SMS
Antenna	SMA External

Ordering

Type	Description	Part Number	Price (ex VAT)
GSMWhiteBox2	GSMWhiteBox2 - 4 digital inputs, 1 relay output, Battery backup - PAYG SIM	SMG-WB5	PLEASE
Power Supply	UK Plug in 230 to 12vDC power supply	PS001	CALL FOR
Antenna	External antenna with SMA connector	SA011A2S	PRICES

This is one of a number of mobile monitoring and control products we supply and support.
If you have any questions or wish to discuss your application please contact us on the number below.



SeNd Technology Ltd • Call: 44(0)1488 668 337 • Email: sales@sendtech.co.uk